

Ostro 11.1

Two way passive coaxial



Introduction

Ostro 11.1 is a passive diffuser with two-channel, direct, coaxial emission.

A professional HI-PRO speaker designed to seamlessly integrate with dedicated transducers, it is built from highly resistant composite materials for elevated sound sensitivity, dynamics, and definition.

Wide angle coverage of a highly controlled sound field, and the ability to reach high levels without perceptible distortion.

The system is characterized by a high-end audio quality and is able to reach elevated sound pressures.

This is classified as a full-range system, in that it does not need a dedicated subwoofer if used in limited spaces, where there would often be insufficient area for a sub.

The system is driven by a special external crossover of extremely high quality and technological complexity, built to high-end specs. This can greatly surpass the quality of sound available through the more common DSP technology or cheap, off-the-shelf crossovers.


Sound dispersion is very precise and regular, allowing it to be used in smaller spaces where sound quality is a high priority.

This allows for excellent dynamics which distinguish the entire system from the first listen.

The coaxial speaker component represents world class quality, without commercial or technological compromises.

Thanks to its elevated sensitivity, the system requires limited amplification power.

A Full Fat audio FFA 2004 is the recommended amplifier for 4 Ostro.

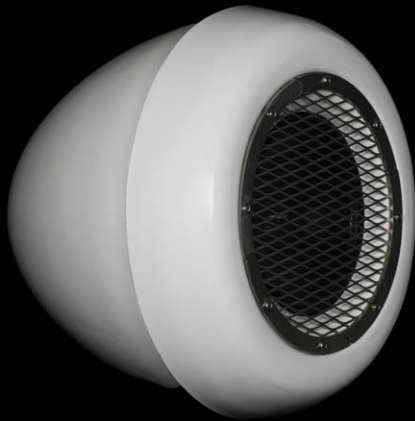

Features

- High-end audio quality
- Perfect for private or enclosed areas
- High sound power
- Huge expandability of performance in perceived power without subwoofer integration
- Extreme sensitivity
- Unbeatable listening dynamics
- Perfect efficiency at all levels of listening
- Perfect adaptability to any musical preference
- Faithful and transparent reproduction at all frequency levels
- Heavy duty, highly resistant to scratches and bumps
- Weather resistance
- Built with high-strength and stiffness composite materials
- Easy to repair and maintain
- Cutting edge technical design
- Unbeatable lightness for easy transport
- Simple installation, either freestanding or suspended
- Customizable color and surface finish
- Simple acoustic calibration

Applications

Dedicated single space, small footprint
Limited interest space, like table dedicated audio
Privè exclusive space
Small club performances
Small-scale events
Sophisticated intimate live events
Max Size of audience within the range of dispersion
Indoor 80 (alone without subwoofer)
Outdoor 50 (alone without subwoofer)
Indoor 150 (with subwoofer)
Outdoor 100 (with subwoofer)
(Recommendations vary depending on the type of subwoofer)



Architectural Specifications

Built from high quality composite materials. Heavy duty, highly resistant to scratches and bumps.

Highly resistant to rain and sun. All metal parts are built in stainless steel.

Mid-low frequency direct emission component is characterized by a light structure with a highly resistant ovoid shell containing a 10" woofer 8 Ohm 500 W continuous power handling , sensitivity 95dB 1W/m.

High frequencies: inner horn equipped with a HF compression driver with titanium diaphragm with voice coil diameter 65mm, @ 8 Ohm 160 W continuous power handling , sensitivity 104 dB 1W/m.

The loudspeaker system Ostro 11.1 is managed passively by a specific crossover filter. The frequency response of the system managed by the dedicated passive filter is linear and uniform, so it does not need equalization correction. Continuous power handling of the system with this passive filter is 450 W 4 Ohm.

A Full Fat audio FFA 2004 is the recommended amplifier for 4 Ostro. The suspension of the system can easily be achieved through chains or cables in steel or synthetic technical fiber. Various mounting solutions are available for a variety of indoor or outdoor applications.

Size of the public served in the range of dispersion: Indoor 80 (alone without subwoofer), outdoor 50 (alone without subwoofer), Indoor 150 (with subwoofer), outdoor 100 (with subwoofer).

(Recommendations vary depending on the type of subwoofer).

Warning:

This is a professional audio system with very high efficiency and sensitivity with acoustic emissions that could potentially cause hearing damage. Installation and use intended for experienced and qualified

TYPE	Two way passive coaxial
FREQUENCY RESPONSE	50 Hz - 18 KHz (-3dB)
TOTAL SENSITIVITY	93 dB/W-m with passive crossover
LOW-MEDIUM FREQUENCIES	10" woofer @ 8 Ohm 500W continuous power handling , sensitivity 95 dB 1W/m
HIGH FREQUENCIES	HF compression driver with titanium diaphragm with voice coil diameter 65mm, @ 8 Ohm 160W continuous power handling , sensitivity 104dB 1W/m
NOMINAL IMPEDANCE	4 Ohm with crossover
POWER HANDLING	450W 4 Ohm with amplifier @ 2 Ohm stable
MANAGE	With dedicated crossover
SPL MAX	119 dB with 450 W
DISPERSION	70 deg conical
CONSTRUCTION MATERIALS	Fiber-reinforced composite, stainless steel, woofer waterproof front side
FINISH	all ral color and texture on order
PROTECTIVE GRILLES	stainless steel on request
CONNECTORS	1x Neutrik NL4FX or custom
DIMENSIONS (without support or suspension)	(W) 48mm (H) 48mm (D) 45mm (W) 18,8inch (H) 18,8 inch (D) 17,7inch
WEIGHT	16Kg (36lb)



HPS Ibiza Phone: +34 641 390972

C/DEL PASSERELL 24 - 07817 IBIZA - ISLAS BALEARES Mail: office@hpsibiza.com Web: www.hpsibiza.com